

A Fuzzy Based Separately Excited DcMotor

Debendra Kumar Sahoo, *Department of Electrical Engineering, Aryan Institute of Engineering & Technology, Bhubaneswar*

Sangram Keshari Sahoo, *Department of Electrical Engineering, NM Institute of Engineering & Technology, Bhubaneswar*

Anil Sahoo, *Department of Electrical Engineering, Capital Engineering College, Bhubaneswar*

Pinaki Prasanna Srichandan, *Department of Electrical Engineering, Raajdhani Engineering College, Bhubaneswar*

ABSTRACT

This paper proposes the importance of a Fuzzy over conventional PID method. The controller is designed based on the expert knowledge of the system. The output response of the system is obtained by using different types of controllers, namely PID and fuzzy logic controller. In this, paper the performance of DC Motor is verified using PID Fuzzy controllers. Finally, the result shows that the Fuzzy approach has minimum overshoot, minimum transient and steady state parameters, which shows more effectiveness and efficiency of Fuzzy than conventional PID.

KEYWORDS: DC Motor, Fuzzy Control, & PID

I. INTRODUCTION

The development of high performance motor drives is very important in industrial as well as other purpose applications such as steel rolling mills, electric trains and robotics. Generally, a high performance motor drive system must have good dynamic speed command tracking and load regulating response to perform task. DC drives, because of their simplicity, ease of application, high reliabilities, flexibilities and favourable cost have long been a backbone of industrial applications, robot manipulators and home appliances where speed and position control of motor are required. DC drives are less complex with a single power conversion from AC to DC. Again the speed torque characteristics of DC motors are much more superior to that of AC motors. A DC motors provide excellent control of speed for acceleration and deceleration. DC drives are normally less expensive for most horsepower ratings. DC motors have a long tradition of use as adjustable speed machines and a wide range of options have evolved for this purpose. In these applications, the motor should be precisely controlled to give the desired performance. The controllers of the speed that are conceived for goal to control the speed of DC motor to execute one variety of tasks, is of several conventional and numeric controller types, the controllers can be: proportional integral (PI), proportional integral derivative (PID) Fuzzy Logic Controller (FLC) or the combination between them The proportional – integral – derivative (PID) controller operates the majority of the control system in the world. It has been reported that more than 95% of the controllers in the industrial process control applications are of PID type as no other controller match the simplicity, clear functionality, applicability and ease of use offered by the PID controller [3], [4]. PID controllers provide robust and reliable performance for most systems if the PID parameters are tuned properly.

II. SYSTEM MODELING OF SEPARATELY EXCITED DC MOTOR:

The equivalent circuit for a separately excited dc motor is shown in Figure 1. When a separately excited motor is excited by a field current i_f and an armature current i_a flows in the armature circuit, the motor develops a back emf and a torque to balance the load torque at a particular speed. The field current of a separately excited motor is independent of the armature current i_a and any change in the armature current has no effect on the field current. The field current is normally much less than the armature current.

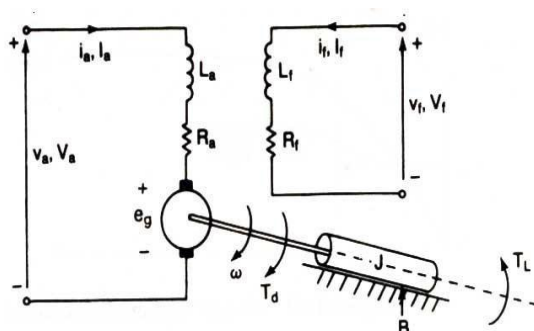


Figure 1: DC Motor Equivalent Circuit

III. MODELING OF SEPARATELY EXCITED DC MOTOR:

From figure 1:

The armature voltage equation is given by: $V_a = E_b + I_a R_a + L_a (dI_a/dt)$
 Now the torque balance equation will be given by: $T_m = J_m(d\omega/dt) + B_m(\omega) + T_L$
 Where:

T_L is load torque in Nm.

Friction in rotor of motor is very small (can be neglected), so $B_m = 0$ Therefore, new torque balance equation will be given by:

$$T_m = J_m(d\omega/dt) + T_L \quad (i)$$

Taking field flux as Φ and Back EMF Constant as K . Equation for back emf of motor will be: $E_b = K \Phi \omega$ (ii)

$$\text{Also, } T_m = K \Phi I_a \quad (iii)$$

Taking laplace transform of the motor's armature voltage equation we get $I_a(s) = (V_a - E_b) / (R_a + L_a s)$

Now, taking equation (ii) into consideration, we have: $I_a(s) = (V_a - K\Phi\omega) / R_a (1 + L_a s/R_a)$

$$\text{And } \omega(s) = (T_m - T_L) / J_s = (K\Phi I_a - T_L) / J_m s$$

(Armature Time Constant) $T_a = L_a/R_a$

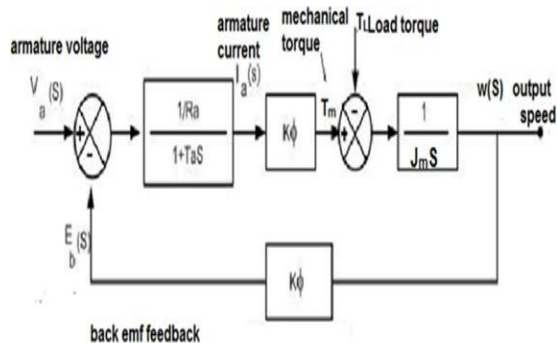


Figure 2: DC Motor Equivalent Circuit

After simplifying the above motor model, the overall transfer function will be $\omega(s) / V_a(s) = [K\Phi / R_a] / J_m s(1 + T_a s) / [1 + (K^2\Phi^2 / R_a) / J_m s(1 + T_a s)]$

PI Controller

A PI Controller (proportional-integral controller) is a combination of proportional and integral controller which is used for eliminating steady state error and peak overshoots¹⁰⁻¹¹. The absence of derivative controller shows more stability under noise conditions. This is because the derivative controller is more sensitive under high frequency systems.

The general expression for PI controller is expressed as,

$$K_P \Delta + K_I \int \Delta dt$$

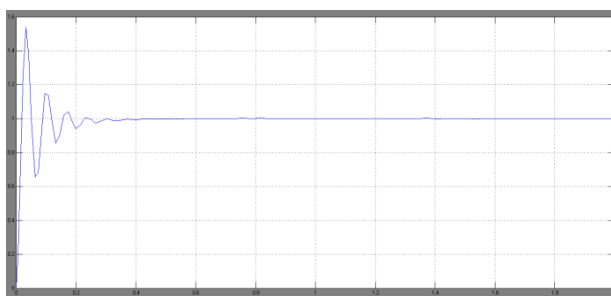


Figure 6: Simulation Result for Speed of DC Motor


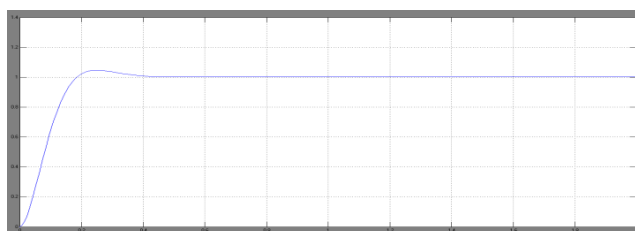


Figure 7: Simulation Result for Speed with Fuzzycontroller

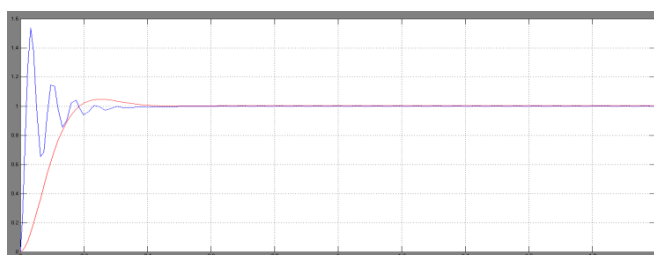

Time	PID	FUZZY
Peak Time	0.03	0.25
Rise Time	0.027	0.225
Delay Time	0.015	0.125
Settling Time	4	0.44
Peak Overshoot	46	5

Table 1: Comparison of Time domain specifications Between PID & Fuzzy Controllers

V. CONCLUSION

In this paper the speed of a DC motor is controlled using fuzzy logic and PID controller. The simulation results are obtained using MATLAB/SIMULINK. The Fuzzy response is compared with that of conventional PID controller. The results show that the overshoot, settling time, peak time and control performance has been improved greatly by using Fuzzy controller. The proposed Fuzzy controller has more advantages, such as higher flexibility, control, better dynamic and static performance compared with conventional controller.

REFERENCES

- [1]. Speed Control of Separately Excited Dc Motor Using Fuzzy Logic Controller, Rekha kushwah, , Sulochana Wadhvani,, International Journal of Engineering Trends and Technology (IJETT) - Volume4 Issue6- June 2013
- [2]. Manafeddin Namazov, "DC motor position control using fuzzy proportional-derivative controllers with different Defuzzification methods" An Official Journal of Turkish Fuzzy Systems Association Vol.1, No.1, pp. 36-54, 2010.
- [3]. Vikas S. Wadnerkar, Mithun M. Bhaskar, Tulasi Ram Das and A.D. Raj Kumar, "A New Fuzzy Logic based Modelling and Simulation of a Switched Reluctance Motor", Journal of Electrical Engineering & Technology Vol. 5, No. 2, pp. 276 - 281, 2010.
- [4]. Atul Kumar Dewangan, Sashai Shukla, Vinod Yadu "Speed Control of a Separately Excited DC Motor Using Fuzzy Logic Control Based on Matlab Simulation Program" International Journal of Scientific & Technology Research Volume 1, Issue 2, ISSN 2277-8616 pp. 52 – 54 ,March 2012
- [5]. Zadeh L. A., "Outline of a New Approach to the Analysis of Complex Systems and Decision Processes", IEEE Transactions Systems, Man and Cybernetics, SMC-3, 1973, pp. 28-44.
- [6]. Sulochana Wadhvani, Veena Verma, Rekha Kushwah, "Design and tuning of PID controller parameters based on fuzzy logic and genetic algorithm", Int. Conf. On soft computing, artificial intelligence, pattern recognition, biomedical engineering and associated technologies (SAPBEATS), Feb 23-24 ,2013", department of electrical engineering, MBM eng. College Jai Narain Vyas university, jodhpur.
- [7]. Nader Jamali Sufi Amlashi "Design and Implementation of Fuzzy Position Control System for Tracking Applications and Performance Comparison with Conventional PID" IAES International Journal of Artificial Intelligence (IJ-AI) Vol. 1, No. 1, March 2012, pp. 31 - 44 ISSN: 2252-8938.
- [8]. Zeyad Assi Obaid, Member, IAENG, Nasri Sulaiman, M. H. Marhaban And M. N. Hamidon, Member IAENG "Analysis and Performance Evaluation of PDlike Fuzzy Logic Controller Design Based on Matlab and FPGA" IAENG International Journal of Computer Science, 37:2, IJCS_37_2_04 (Advance online publication: 13 May 2010).
- [9]. Rekha Kushwah, Sulochana Wadhvani, "Fuzzy Logic based Tuning of PID Controller Parameters", National Conference on New Frontiers for Women in Science and Technology March 20- 21, 2013, Jiwaji University, Gwalior (M.P.).