

The Effect of Chemical Reaction on Mhd Free Convection Flow Of Dissipative Fluid Past An Exponentially Accelerated Vertical Plate

P.M. Kishore¹, S. Vijayakumar Varma² S. Masthan Rao³ and K.S. Bala Murugan³

¹ Department of Mathematics, Narayana Engineering College, Nellore - 524001 (A.P), India.

² Department of Mathematics, S.V. University, Tirupathi-517502 (A.P), India.

³ Department of Mathematics, R.V.R & J.C. College of Engineering, Guntur, (A.P), India.

ABSTRACT:

Aim of the paper is to investigate the the chemical reaction effect on the unsteady mhd free convection flow, heat and mass transfer characteristics in a viscous, incompressible and electrically conducting fluid past an exponentially accelerated vertical plate by taking into account the heat due to viscous dissipation. The problem is governed by coupled non-linear partial differential equations. The dimensionless equations of the problem have been solved numerically by the unconditionally stable finite difference method of Dufort – Frankel’s type. The effects of governing parameters on the flow variables are discussed quantitatively with the aid of graphs for the flow field, temperature field, concentration field, skin-friction, Nusselt number and Sherwood number.

KEY WORDS: MHD, free convection, viscous dissipation, finite difference method, exponentially accelerated plate, chemical reaction.

I. INTRODUCTION

Free convection flow involving coupled heat and mass transfer occurs frequently in nature and in industrial processes. A few representative fields of interest in which combined heat and mass transfer plays an important role are designing chemical processing equipment, formation and dispersion of fog, distribution of temperature and moisture over agricultural fields and groves of fruit trees, crop damage due to freezing, and environmental pollution. Hydromagnetic flows and heat transfer have become more important in recent years because of its varied applications in agricultural engineering and petroleum industries. Recently, considerable attention has also been focused on new applications of magneto-hydrodynamics (MHD) and heat transfer such as metallurgical processing. Melt refining involves magnetic field applications to control excessive heat transfer rate. Other applications of MHD heat transfer include MHD generators, plasma propulsion in astronautics, nuclear reactor thermal dynamics and ionized-geothermal energy systems.

Pop and Soundalgekar [1] have investigated the free convection flow past an accelerated infinite plate. Singh and Soundalgekar [2] have investigated the problem of transient free convection in cold water past an infinite vertical porous plate. An excellent summary of applications can be found in Hughes and Young [3](1966). Takar et al. [4] analyzed the radiation effects on MHD free convection flow past a semi-infinite vertical plate using Runge-Kutta-Merson quadrature. Recently the natural convection flow of a conducting visco-elastic liquid between two heated vertical plates under the influence of transverse magnetic field has been studied by Sreehari Reddy et al. [5]. The studies of convective heat transfer in porous media have been more concerned in the past, with steady state conditions (Nield, D.A. and Bejan, A., [6]. Meanwhile, recent engineering developments have led also to an increasing interest in accurate investigations of the transient processes in these media. A detailed review of the subject including exhaustive list of references can be found in the papers by Bradean et.al. [7]. Mass diffusion effect on transient convection flow past a surface was elucidated by Cheng et.al. [8]. Chaundhary et.al. [9] analyzed free convection effects on flow past a moving vertical plate embedded in porous medium by Laplace – transform technique. In all these investigations, the viscous dissipation is neglected. The viscous dissipation heat in the natural convective flow is important, when the flow field is of extreme size or at low temperature or in high gravitational field. Such effects are also important in geophysical flows and also in certain industrial operations and are usually characterized by the Eckert number.

Whenever the temperature of surrounding fluid is high, the radiation effects play an important role and this situation does exist in space technology. In such cases one has to take into account the effects of radiation and free convection. A number of authors have considered viscous heating effects on Newtonian flows. Israel-Cooke et al. [10] investigated the influence of viscous dissipation and radiation on unsteady MHD free convection flow past an infinite heated vertical plate in a porous medium with time dependent suction. Zueco Jordan [11] used network simulation method (NSM) to study the effects of viscous dissipation and radiation on unsteady MHD free convection flow past a vertical porous plate. Suneetha et al. [12] have analyzed the effects of viscous dissipation and thermal radiation on hydromagnetic free convection flow past an impulsively started vertical plate. Recently Suneetha et al. [13] studied the effects of thermal radiation on the natural convective heat and mass transfer of a viscous incompressible gray absorbing-emitting fluid flowing past an impulsively started moving vertical plate with viscous dissipation. Very recently Hitesh Kumar [14] has studied the boundary layer steady flow and radiative heat transfer of a viscous incompressible fluid due to a stretching plate with viscous dissipation effect in the presence of a transverse magnetic field.

The effects of mass transfer on flow past an impulsively started infinite vertical plate with constant heat flux and chemical reaction have been studied by Das et al. [15]. Chamkha [16] obtained analytical solutions for heat and mass transfer by laminar flow of a Newtonian, viscous, electrically conducting and heat generating/absorbing fluid on a continuously moving vertical permeable surface in the presence of a magnetic field and first order chemical reaction. Kandasamy et al. [17] presented an approximate numerical solution of chemical reaction, heat and mass transfer on MHD flow over a vertical stretching surface with heat source and thermal stratification effects. The influence of chemical reaction on heat and mass transfer by natural convection from vertical surfaces was included by Postelnicu [18] in porous media considering Soret and Dufour effects. Sharma et al. [19] have investigated the influence of chemical reaction and radiation on an unsteady magnetohydrodynamic free convective flow and mass transfer through viscous incompressible fluid past a heated vertical porous plate immersed in porous medium in the presence of uniform transverse magnetic field, oscillating free stream and heat source when viscous dissipation effect is also taken into account. Anand Rao and Shivaiah [20] have analyzed the effect of chemical reaction on an unsteady MHD free convective flow past an infinite vertical porous plate in the presence of constant suction and heat source. Approximate solutions have been derived for velocity, temperature, concentration profiles, skin friction, rate of heat transfer and rate of mass transfer using finite element method.

The study of heat and mass transfer with chemical reaction is of great practical importance to engineers and scientists because of its almost universal occurrence in many branches of science and engineering. Possible applications of this type of flow can be found in many industries like power industry and chemical process industries. The objective of the present work is to study the influence of chemical reaction on transient free convection flow of an incompressible viscous fluid past an exponentially accelerated vertical plate by taking into account viscous dissipative heat, under the influence of a uniform transverse magnetic field in the presence of variable surface temperature and concentration. We have extended the problem of Muthucumaraswamy et al. [21].

II. MATHEMATICAL ANALYSIS

The transient MHD free convection flow of an electrically conducting, viscous dissipative incompressible fluid past an exponentially accelerated vertical infinite plate with variable temperature and concentration in the presence of chemical reaction of first order has been presented. The present flow configuration is shown in Figure 1.

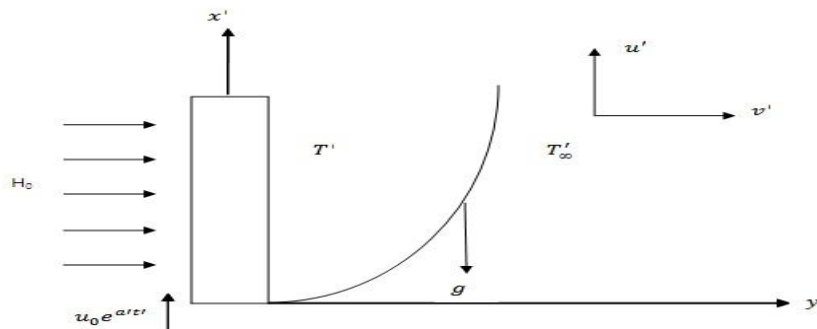


Figure (1): Flow configuration and coordinate system

The x' - axis is taken along the plate in the vertically upward direction and the y' - axis is taken normal to the plate. Since the plate is considered infinite in x' - direction, all flow quantities become self-similar away from the leading edge. Therefore, all the physical variables become functions of t' and y' only. At time $t' \leq 0$, the plate and fluid are at the same temperature T'_w and concentration C'_w lower than the constant wall temperature T'_∞ and concentration C'_∞ respectively. At $t' > 0$, the plate is exponentially accelerated with a velocity $u' = u_0 \exp(a't')$ in its own plane and the plate temperature and concentration are raised linearly with time t' . Also, it is assumed that there is a homogeneous chemical reaction of first order with rate constant k_1 between the diffusing species and the fluid. The reaction is assumed to take place entirely in the stream. A uniform magnetic field of intensity H_0 is applied in the y' - direction. Therefore the velocity and the magnetic field are given by $\vec{q} = (u, v)$ and $\vec{H} = (0, H_0)$. The fluid being electrically conducting the magnetic Reynolds number is much less than unity and hence the induced magnetic field can be neglected in comparison with the applied magnetic field in the absence of any input electric field. The heat due to viscous dissipation is taken into an account. Under the above assumptions as well as Boussinesq's approximation, the equations of conservation of mass, momentum, energy and species governing the free convection boundary layer flow past an exponentially accelerated vertical plate can be expressed as:

$$\frac{\partial v'}{\partial y'} = 0 \tag{1}$$

$$\frac{\partial u'}{\partial t'} = g\beta(T' - T'_\infty) + g\beta^*(C' - C'_\infty) + \nu \frac{\partial^2 u'}{\partial y'^2} - \frac{\sigma\mu_e^2 H_0^2}{\rho} u' \tag{2}$$

$$\rho C_p \frac{\partial T'}{\partial t'} = k \frac{\partial^2 T'}{\partial y'^2} + \mu \left(\frac{\partial u'}{\partial y'} \right)^2 \tag{3}$$

$$\frac{\partial C'}{\partial t'} = D \frac{\partial^2 C'}{\partial y'^2} - K_1(C' - C'_\infty) \tag{4}$$

with the following initial and boundary conditions:

$$\begin{aligned} u' = 0, \quad T' = T'_\infty, \quad C' = C'_\infty; \quad \text{for all } y', t' \leq 0 \\ t' > 0: \quad u' = u_0 \exp(a't'), \quad T' = T'_\infty + (T'_w - T'_\infty) A t', \quad C' = C'_\infty + (C'_w - C'_\infty) A t', \quad \text{at } y' = 0 \\ u' \rightarrow 0, \quad T' \rightarrow T'_\infty, \quad C' \rightarrow C'_\infty, \quad \text{as } y' \rightarrow \infty \end{aligned}$$

Where $A = \frac{u_0^2}{\nu}$, T'_w and C'_w are constants not wall values (5)

On introducing the following non-dimensional quantities:

$$\begin{aligned} u = \frac{u'}{u_0}, \quad t = \frac{t' u_0^2}{\nu}, \quad y = \frac{y' u_0}{\nu}, \quad \theta = \frac{T' - T'_\infty}{T'_w - T'_\infty}, \quad M = \frac{\sigma\mu_e^2 H_0^2 \nu}{\rho u_0^2}, \\ Gr = \frac{g\beta\nu(T'_w - T'_\infty)}{u_0^3}, \quad Pr = \frac{\mu C_p}{k}, \quad E = \frac{u_0^2}{C_p(T'_w - T'_\infty)}, \quad a = \frac{a'\nu}{u_0^2} \\ Gc = \frac{g\beta^*\nu(C'_w - C'_\infty)}{u_0^3}, \quad C = \frac{C'_w - C'_\infty}{C'_w - C'_\infty}, \quad Sc = \frac{\nu}{D}, \quad K = \frac{\nu K_1}{u_0^2} \end{aligned} \tag{6}$$

in equations (1) to (5), lead to

$$\frac{\partial u}{\partial t} = Gr\theta + GcC + \frac{\partial^2 u}{\partial y^2} - Mu \tag{7}$$

$$\frac{\partial \theta}{\partial t} = \frac{1}{Pr} \frac{\partial^2 \theta}{\partial y^2} + E \left(\frac{\partial u}{\partial y} \right)^2 \quad (8)$$

$$\frac{\partial C}{\partial t} = \frac{1}{Sc} \frac{\partial^2 C}{\partial y^2} - KC \quad (9)$$

The initial and boundary conditions in non-dimensional quantities are

$$\begin{aligned} u = 0, \quad \theta = 0, \quad C = 0 \quad \text{for all } y, t \leq 0 \\ t > 0: \quad u = \exp(at), \quad \theta = t, \quad C = t \quad \text{at } y = 0 \\ u \rightarrow 0, \quad \theta \rightarrow 0 \quad C \rightarrow 0 \quad \text{as } y \rightarrow \infty \end{aligned} \quad (10)$$

The skin-friction, Nusselt number and Sherwood number are the important physical parameters for this type of boundary layer flow, which in non-dimensional form respectively are given by:

$$\tau = - \left(\frac{\partial u}{\partial y} \right)_{y=0} \quad (11)$$

$$Nu = - \left(\frac{\partial \theta}{\partial y} \right)_{y=0} \quad (12)$$

$$Sh = - \left(\frac{\partial C}{\partial y} \right)_{y=0} \quad (13)$$

III. NUMERICAL TECHNIQUE

Equations (7) – (9) are coupled non-linear partial differential equations and are to be solved under the initial and boundary conditions of equation (10). However exact solution is not possible for this set of equations and hence we solve these equations by the unconditionally stable explicit finite difference method of DuFort – Frankel’s type as explained by Jain et. al. [22]. The finite difference equations corresponding to equations (7) – (9) are as follows:

$$\begin{aligned} \left(\frac{u_{i,j+1} - u_{i,j-1}}{2\Delta t} \right) = \left(\frac{u_{i-1,j} - u_{i,j+1} - u_{i,j-1} + u_{i+1,j}}{(\Delta y)^2} \right) + \frac{Gr}{2} (\theta_{i,j+1} + \theta_{i,j-1}) \\ + \frac{Gc}{2} (C_{i,j+1} + C_{i,j-1}) - \frac{M}{2} (u_{i,j+1} + u_{i,j-1}) \end{aligned} \quad (14)$$

$$\frac{\theta_{i,j+1} - \theta_{i,j-1}}{2\Delta t} = \frac{1}{Pr} \left(\frac{\theta_{i-1,j} - \theta_{i,j+1} - \theta_{i,j-1} + \theta_{i+1,j}}{(\Delta y)^2} \right) + E \left(\frac{u_{i+1,j} - u_{i,j}}{\Delta y} \right)^2 \quad (15)$$

$$\frac{C_{i,j+1} - C_{i,j-1}}{2\Delta t} = \frac{1}{Sc} \left(\frac{C_{i-1,j} - C_{i,j+1} - C_{i,j-1} + C_{i+1,j}}{(\Delta y)^2} \right) - \frac{K}{2} (C_{i,j+1} + C_{i,j-1}) \quad (16)$$

Initial and boundary conditions take the following forms

$$\begin{aligned} u_{i,0} = 0, \quad \theta_{i,0} = 0 \quad C_{i,0} = 0 \quad \text{for all } i \neq 0 \\ u_{0,j} = \exp(a \cdot j \cdot \Delta t), \quad \theta_{0,j} = j \cdot \Delta t \quad C_{0,j} = j \cdot \Delta t \\ u_{L,j} = 0, \quad \theta_{L,j} = 0, \quad C_{L,j} = 0 \end{aligned} \quad (17)$$

Where L corresponds to ∞ .

Here the suffix 'i' corresponds to 'y' and 'j' corresponds to 't'. Also $\Delta t = t_{j+1} - t_j$ and $\Delta y = y_{i+1} - y_i$.

Here we consider a rectangular grid with grid lines parallel to the coordinate axes with spacing Δy and Δt in space and time directions respectively. The grid points are given by $y_i = i \cdot \Delta y$, $i = 1, 2, 3, \dots, L-1$ and $t_j = j \cdot \Delta t$, $j = 1, 2, 3, \dots, P$. The spatial nodes on the j^{th} time grid constitute the j^{th} layer or level. The maximum value of y was chosen as 12 after some preliminary investigations, so that the two of the boundary conditions of equation (17) are satisfied. Here the maximum value of y corresponds to $y = \infty$. After experimenting with few sets of mesh sizes, they have been fixed at the level $\Delta y = 0.05$ and the time step $\Delta t = 0.000625$, in this case, spacial mesh size is reduced by 50% and the results are compared. It is observed that when mesh size is reduced by 50% in $y -$ direction, the result differ only in the fifth decimal place.

The values of C , θ and u are known at all grid points at $t = 0$ from the initial conditions. The values of C , θ and u at time level 'j+1' using the known values at previous time level 'j' are calculated as follows. The values of 'C' are calculated explicitly using the equation (16) at every nodal point at $(j+1)^{\text{th}}$ time level. Thus, the values of 'C' are known at every nodal point at $(j+1)^{\text{th}}$ time level. Similarly the values of ' θ ' are calculated from equation (15). Using the values of 'C' and ' θ ' at $(j+1)^{\text{th}}$ time level in equation (14), the values of ' u ' at $(j+1)^{\text{th}}$ time level are found in similar manner. This process is continued to obtain the solution till desired time 't'. Thus the values of C , θ and u are known, at all grid points in the rectangular region at the desired time level. The local truncation error is $O(\Delta t + \Delta y + (\Delta t / \Delta y)^2)$ and it tends to zero when $(\Delta t / \Delta y)$ tends to zero as Δy tends to zero. Hence the scheme is compatible. The finite difference scheme is unconditionally stable. Compatibility and stability ensures the convergence of the scheme. The derivatives involved in equations (11) - (13) are evaluated using five point approximation formula. The accuracy of the present model has been verified by comparing with the theoretical solution of Muthucumaraswamy et al. [31] through Figure 2 and the agreement between the results is excellent. This has established confidence in the numerical results reported in this paper.

IV. RESULTS AND DISCUSSION

It is very difficult to study the influence of all governing parameters involved in the present problem "the effects of viscous dissipation, heat and mass transfer on the transient MHD free convection flow in the presence of chemical reaction of first order". Therefore, this study is focused on the effects of governing parameters on the transient velocity, temperature as well as on the concentration profiles. To have a physical feel of the problem we, exhibit results to show how the material parameters of the problem affect the velocity, temperature and concentration profiles. Here we restricted our discussion to the aiding of favourable case only, for fluids with Prandtl number $Pr = 0.71$ which represent air at 20°C at 1 atmosphere. The value of thermal Grashof number Gr is taken to be positive, which corresponds to the cooling of the plate. The diffusing chemical species of most common interest in air has Schmidt number (Sc) and is taken for Hydrogen ($Sc = 0.22$), Oxygen ($Sc = 0.66$), and Carbon dioxide ($Sc = 0.94$). Extensive computations were performed. Default values of the thermo physical parameters are specified as follows: Magnetic parameter $M = 2$, thermal Grashof number $Gr = 5$, mass Grashof number $Gc = 5$, acceleration parameter $a = 0.5$, Prandtl number $Pr = 0.71$ (air), Eckert number $E = 0.05$, Schmidt number $Sc = 0.22$ (hydrogen), chemical reaction parameter $K=1$ and time $t = 0.2$ and 0.6 . All graphs therefore correspond to these values unless otherwise indicated. The effects of governing parameters like magnetic field, thermal Grashof number as well as mass Grashof number, acceleration parameter, viscous dissipation, Prandtl number, and time on the transient velocity have been presented in the respective Figures 3 to 9 for $t = 0.2$ and $t = 0.6$ in presence of foreign species ' $Sc = 0.22$ '.

Figure (3) illustrate the influences of ' M '. It is found that the velocity decreases with increasing magnetic parameter for air ($Pr = 0.71$) in presence of Hydrogen. The presence of transverse magnetic field produces a resistive force on the fluid flow. This force is called the Lorentz force, which leads to slow down the motion of electrically conducting fluid. Figs. (4) and (5) reveal the velocity variations with Gr and Gc for $t = 0.2$ and $t = 0.6$ respectively. It is observed that greater cooling of surface (an increase in Gr) and increase in Gc results in an increase in the velocity for air. It is due to the fact increase in the values of thermal Grashof number and mass Grashof number has the tendency to increase the thermal and mass buoyancy effect. This gives rise to an increase in the induced flow. The effect of acceleration parameter (a) on the transient velocity (u) is plotted in Figure (6). It is noticed that an increase in acceleration parameter leads to increase in u . Fig.(7) display the effects ' E ' on the velocity field for the cases $Gr > 0$, $Gc > 0$ respectively. Eckert number is the ratio of the kinetic energy of the flow to the boundary layer enthalpy difference. The effect of viscous dissipation on flow field is to increase the energy, yielding a greater fluid temperature and as a consequence greater buoyancy force. The increase in the buoyancy force due to an increase in the dissipation parameter enhances the velocity in cooling of the plate.

The effect of Prandtl number ' Pr ' on the velocity variations is depicted in Fig (8) for cooling of the plate. The velocity for $Pr=0.71$ is higher than that of $Pr=7$. Physically, it is possible because fluids with high Prandtl number have high viscosity and hence move slowly. The effect of time ' t ' on the velocity in cooling of the plate is shown in Fig. (9). It is obvious from the figure that the velocity increases with the increase of time ' t '. It is seen from Fig. 10 that under the influence of chemical reaction, the flow velocity reduces. The hydrodynamics boundary layer becomes thin as the chemical reaction parameter increases. Figure (11) reveals the transient temperature profiles against y (distance from the plate). The magnitude of temperature is maximum at the plate and then decays to zero asymptotically. The magnitude of temperature for air ($Pr=0.71$) is greater than that of water ($Pr=7$). This is due to the fact that thermal conductivity of fluid decreases with increasing ' Pr ', resulting a decrease in thermal boundary layer thickness. Also the temperature increases with an increase in the time ' t ' for both air and water. It is marked from Fig. (12) that the increasing value of the viscous dissipation parameter enhancing the flow temperature for $t = 0.2$ and $t = 0.6$.

Figure 13 illustrate the dimensionless concentration profiles (C) for Schmidt number. A decrease in concentration with increasing ' Sc ' is observed from this figure. Also, it is noted that the concentration boundary layer becomes thin as the Schmidt number increases. Figure 14 demonstrate the dimensionless concentration profiles (C) for chemical reaction (K). A decrease in concentration with increasing ' K ' is observed from this figure. Also, it is noted that the concentration boundary layer becomes thin as the chemical reaction parameter increases. The effects of magnetic field, thermal Grashof number, mass Grashof number acceleration parameter, Prandtl number, Eckert number, Schmidt number and chemical reaction on the skin-friction against time t are presented in the figure 15. It is noticed that the skin friction increases with an increase in magnetic field, Prandtl number, Schmidt number, acceleration parameter and chemical reaction parameter while it decreases with an increase in thermal Grashof number, mass Grashof number and Eckert number for air. Figure 16 depicts the Nusselt number against time ' t ' for various values of parameters ' M, Gr, Gc, Pr, E, Sc and a '. Nusselt number for $Pr=7$ is higher than that of $Pr=0.71$. The reason is that smaller values of Pr are equivalent to increasing thermal conductivities and therefore heat is able to diffuse away from the plate more rapidly than higher values of Prandtl number. Hence, the rate of heat transfer is enhanced. It is found that the rate of heat transfer falls with increasing Gr, Gc, E . Also Nusselt number increases as magnetic parameter ' M ', Schmidt number Sc , acceleration parameter a and chemical reaction parameter K increases. It is marked from Fig. (17) that the rate of concentration transfer increases with increasing values of magnetic parameter ' M ', Schmidt number ' Sc ', Prandtl number, acceleration parameter ' a ' and chemical reaction parameter ' K ' while it decreases with an increase in Gr, Gc, E .

V. CONCLUSIONS

In this paper effects of viscous dissipation and MHD on free convection flow past an exponentially accelerated vertical plate with variable surface temperature and concentration have been studied numerically. Explicit finite difference method is employed to solve the equations governing the flow. From the present numerical investigation, following conclusions have been drawn:

- It is found that the velocity decreases with increasing magnetic parameter (M) and it increases as Gr, Gc and acceleration parameter ' a ' increases.
- An increase in the dissipation parameter enhances the velocity in cooling of the plate.
- The velocity for $Pr=0.71$ is higher than that of $Pr=7$.
- Under the influence of chemical reaction, the flow velocity reduces while the velocity increases with the increase of time ' t '
- The increasing value of the viscous dissipation parameter enhancing the flow temperature as well as temperature increases with an increase in the time ' t ' for both air and water. However, significantly, it is observed that the temperature decreases with increasing Pr .
- A decrease in concentration with increasing Schmidt number as well as chemical reaction parameter is observed.
- Skin friction increases with an increase in magnetic field, acceleration parameter, Schmidt number and chemical reaction parameter while it decrease with an increase in thermal Grashof number, mass Grashof number, Eckert number for air. The magnitude of the Skin-friction for water is greater than air.
- It is found that the rate of heat transfer falls with increasing magnetic field, acceleration parameter and Eckert number while it increases with an increase in thermal Grashof number and chemical reaction parameter.
- The rate of concentration transfer increases with increasing values of magnetic parameter, Schmidt number, Prandtl number, acceleration parameter and chemical reaction parameter while it decreases with an increase in thermal Grashof number, mass Grashof number, Eckert number.

REFERENCES:

- [1] Pop, I. and Soundalgekar, V.M. (1980). Free convection flow past an accelerated infinite plate, *Z. Angew.Math.Mech.* 60, 167 – 168.
- [2] Singh, A.K. and Soundalgekar, V.M. (1990). Transient free convection in cold water past an infinite vertical porous plate, *Int. J. of Energy Res* 14, 413 –420.
- [3] Huges, W.F., Yong, F.J. (1966). *The electro-Magneto-Dynamics of fluids*, John Wiley & Sons, New york, USA.
- [4] Takar, H.S., Gorla, R.S.R. and Soundalgekar, V.M. (1996). Radiation effects on MHD free convection flow of a radiating fluid past a semi – infinite vertical plate. *Int. J. Numerical Methods for Heat & Fluid Flow*, 6, 77 – 83.
- [5] Sreehari Reddy, P., Nagarajan, A.S. and Sivaiah, M. (2008). Hydro magnetic Elastic Free convection of a conducting elastico – viscous liquid between heated vertical plates, *Journal of Naval Architecture and Marine Engng*, 2, 47 – 56.
- [6] Nield, D.A. and Bejan, A. (1999). *Convection in Porous Media*, Springer, Berlin.
- [7] Bradean, R., Ingham, D.B., Heggs, P.J. and Pop, I. (1998). Convective heat flow from suddenly heated surfaces embedded in porous media, *Transport Phenomena in Porous Media* (Ingham, D.B. and Pop.I. (eds.)), Oxford , Pergamon Press, 411 –438.
- [8] Cheng, Ching-Yang (2000). Transient heat and mass transfer by natural convection from vertical surfaces in porous media, *J. Phys. D: Appl. Phys.*, 33, 1425-1430.
- [9] Chaudhary, R.C. and Jain, A. (2007). Combined heat and mass transfer effects on MHD free convection flow past an oscillating plate embedded in porous medium, *Rom. J. of Phy.*, 52, 505-524.
- [10] Israel – cookey, C., Ogulu, A., Omubo – Pepple, V.M. (2003). The influence of viscous dissipation and radiation on unsteady MHD free convection flow past an infinite heated vertical plate in a porous medium with time deperdent suction. *Int. J. Heat Mass Transfer*, 46, 13, 2305 – 2311.
- [11] Zueco Jordan, J. (2007). Network Simulation Method Applied to Radiation and Dissipation Effects on MHD Unsteady Free Convection over Vertical Porous Plate. *Appl.Math., Modeling*, 31, 20, 2019 – 2033.
- [12] Suneetha, S., Bhaskar Reddy, N. and Ramachandra Prasad, V. (2008). The thermal radiation effects on MHD free convection flow past an impulsively started vertical plate with variable surface temperature and concentration. *Journal of Naval Architecture and Marine engineering*, 2, 57 – 70.
- [13] Suneetha, S., Bhaskar Reddy, N. and Ramachandra Prasad, V. (2009). Radiation and mass transfer effects on MHD free convection flow past an impulsively started isothermal vertical plate with dissipation. *Thermal Science*, 13, 2, 71 – 181.
- [14] Hitesh Kumar (2009). Radiative Heat Transfer with Hydro magnetic flow and viscous dissipation over a stretching surface in the presence of variable heat flux. *Thermal Science* 13, 2, 163 – 169.
- [15] Das. U.N., Deka, R. and Soundalgekar V.M. (1994). Effects of mass transfer on flow past an impulsively started infinite vertical plate with constant heat flux and chemical reaction, *Forsch. Ingenieurwes.*, 60, pp. 284–287.
- [16] Chamkha, A.J. (2003). MHD Flow of a Uniformly Stretched Vertical Permeable Surface in the Presence of Heat Generation/Absorption and Chemical Reaction. *Int. Comm. Heat Mass Transfer*, V30, N3, pp. 413-422.
- [17] Kandasamy, R., Periasamy, K., Prabhu, K.K.S. (2005). Chemical Reaction, Heat and Mass Transfer on MHD Flow Over a Vertical Stretching Surface with Heat Source and Thermal Stratification Effects, *Int. J.Heat Mass Transfer*, V48, pp. 4557-4561.
- [18] Postelnicu, A. (2007). Influence of Chemical Reaction on Heat and Mass Transfer by Natural Convection from Vertical Surfaces in Porous Media Considering Soret and Dufour Effects, *Heat Mass Transfer*, V43, pp. 595-602.
- [19] Sharma, P. R., Navin Kumar and Pooja Sharma. (2011). Influence of Chemical Reaction and Radiation on Unsteady MHD Free Convective Flow and Mass Transfer through Viscous Incompressible Fluid Past a Heated Vertical Plate Immersed in Porous Medium in the Presence of Heat Source, *Applied Mathematical Sciences*, Vol. 5, No.46, 2249 – 2260.
- [20] Anand Rao, J. and Shivaiah, S. (2011). Chemical reaction effects on an unsteady MHD free convective flow past an infinite vertical porous plate with constant suction and heat source *Int. J. of Appl. Math and Mech.* 7 (8): 98-118.
- [21] Muthucumaraswamy, R. and Valliamma, V. (2012). MHD flow past an exponentially accelerated vertical plate with variable temperature and mass diffusion in the presence of chemical reaction, *Annals Of Faculty Engineering Hunedoara – International Journal Of Engineering*, 1, 151-154.
- [22] Jain, M.K., Iyengar, S.R.K., Jain, R.K., *Computational Methods for Partial Differential Equations*, Wiley Eastern Limited, (1994).

NOMENCLATURE

A, a', a	Constants
C_p	Specific heat at constant pressure $J .kg^{-1} K^{-1}$
C'	Species concentration $kg .m^{-3}$
C	Dimensionless concentration
D	Mass Diffusion coefficient $m^2 .s^{-1}$
E	Eckert number
Gr	Thermal Grashof number
Gc	Mass Grashof number
g	Acceleration due to gravity $m .s^{-2}$
H_0	Magnetic field intensity $A .m^{-1}$
k	Thermal conductivity $W .m^{-1} .K^{-1}$
k'	permeability of the porous medium
k_e	mean absorption coefficient

K_l	Chemical reaction coefficient s^{-1}
K	Dimensionless chemical reaction parameter
K_1	permeability parameter
M	Magnetic parameter
Nu	Nusselt Number
Pr	Prandtl number
q_r	the radiation heat flux.
Sc	Schmidt number
T'	Temperature of the fluid near the plate K
T	Dimensionless temperature of the fluid near the plate
t'	Time s
t	Dimensionless time
u'	Velocity of the fluid in the x' - direction $m.s^{-1}$
u_0	Velocity of the plate $m.s^{-1}$
u	Dimensionless velocity
y'	Coordinate axis normal to the plate m
y	Dimensionless coordinate axis normal to the plate

Greek symbols

β	Volumetric coefficient of thermal expansion K^{-1}
β^*	Volumetric coefficient of thermal expansion with concentration K^{-1}
θ	Dimensionless temperature
μ	Coefficient of viscosity $Pa.s$
μ_e	Magnetic permeability $H.m^{-1}$
ν	Kinematic viscosity $m^2.s^{-1}$
ρ	Density of the fluid $kg.m^{-3}$
σ	Electrical conductivity of the fluid $VA^{-1}m^{-1}$
σ_s	Stefan – Boltzmann Constant
τ	Dimensionless shear stress

Subscripts

w	Conditions at the wall
∞	Conditions in the free stream

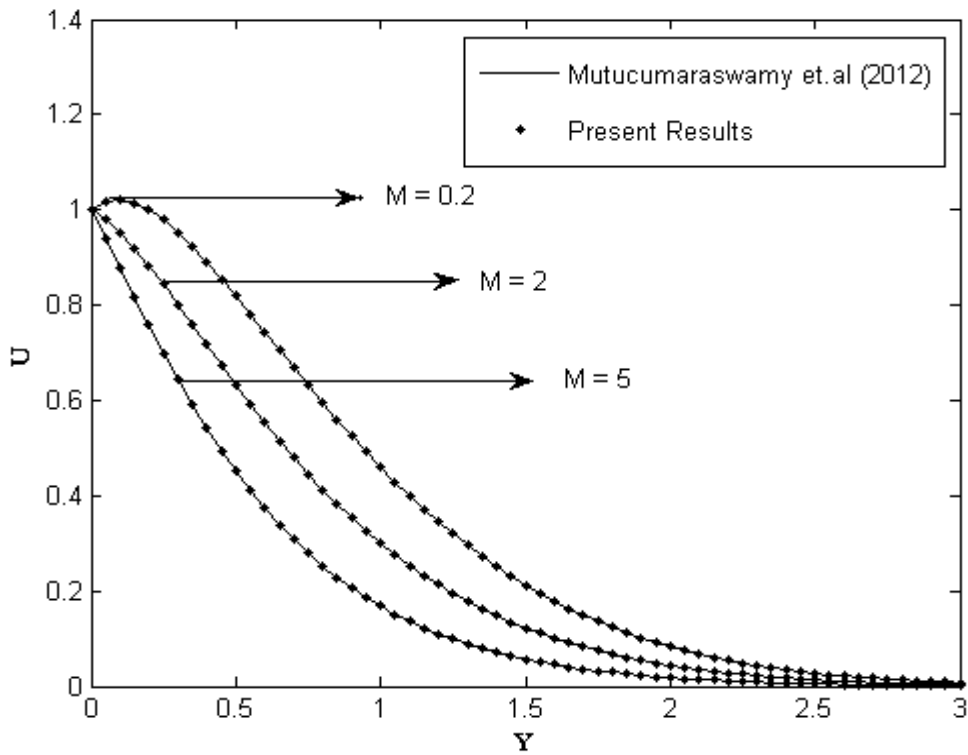


Figure (2): Velocity profile for different values of 'M' when $Pr = 7$, $E = 0$, $a = 0.1$ and $K=5$,

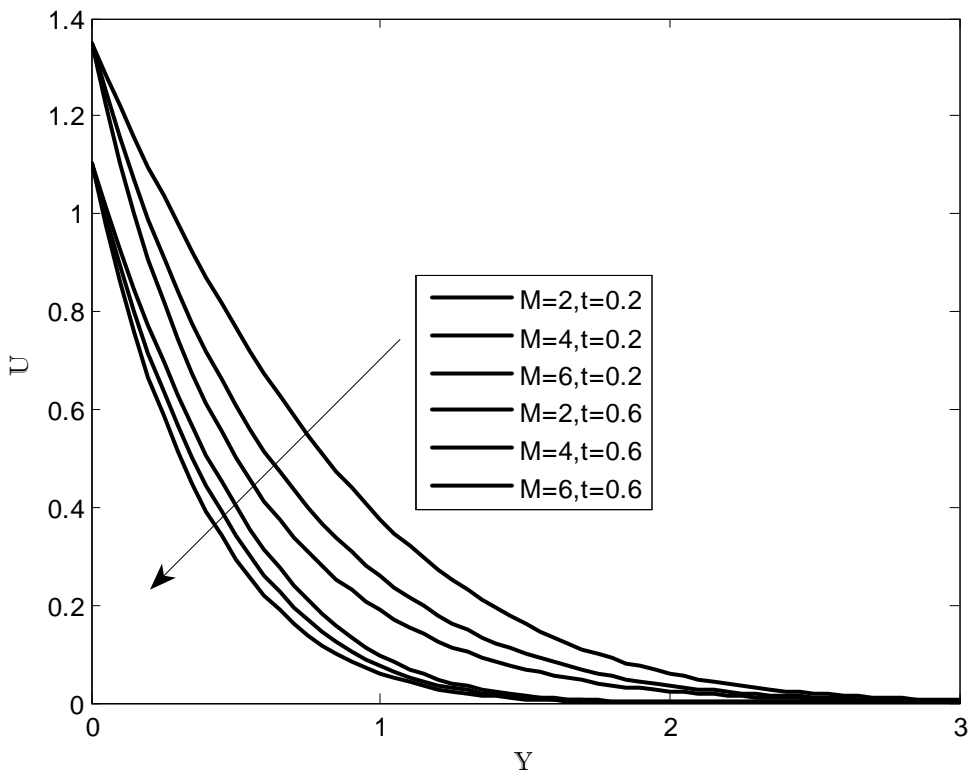


FIG. (3): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'M'

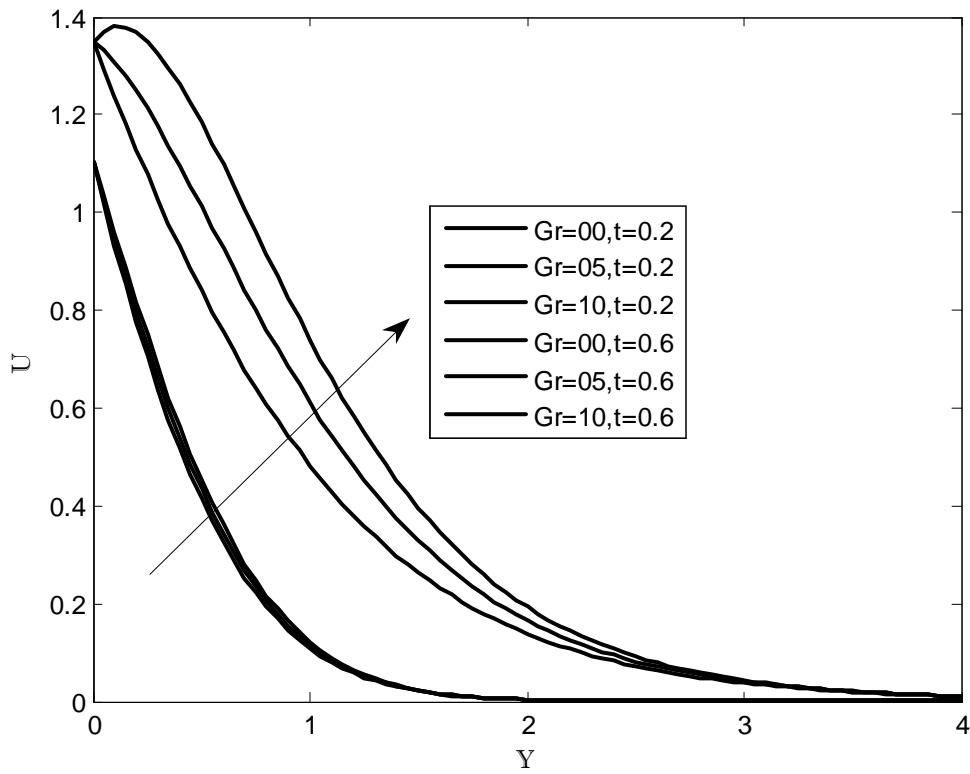


FIG. (4): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'Gr'

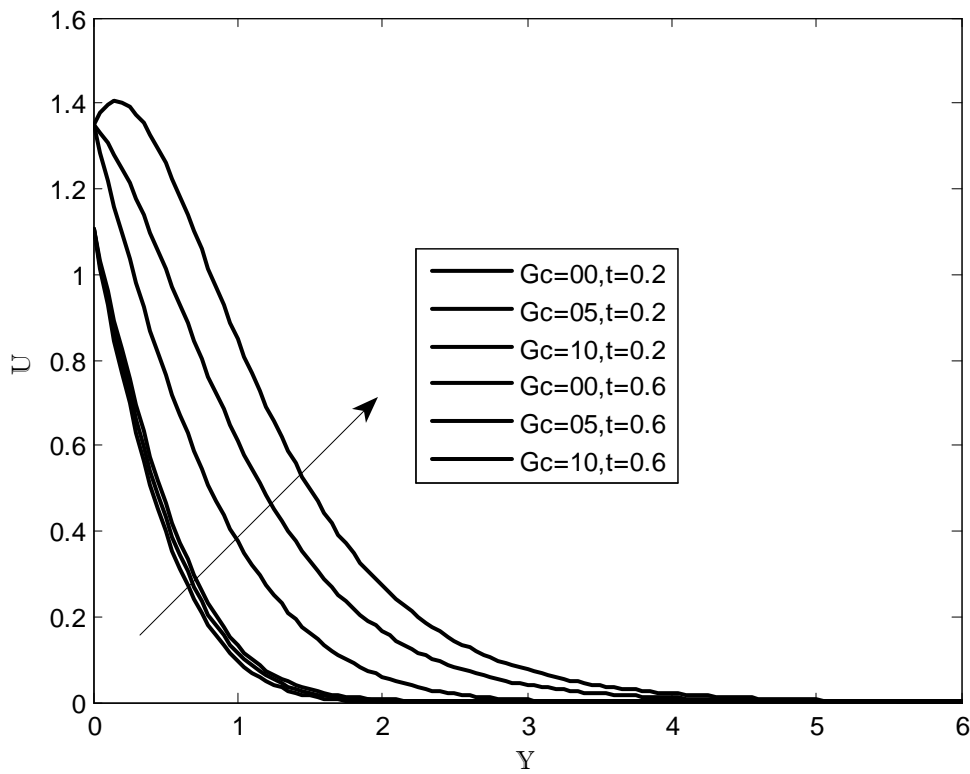


FIG. (5): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'Gc'

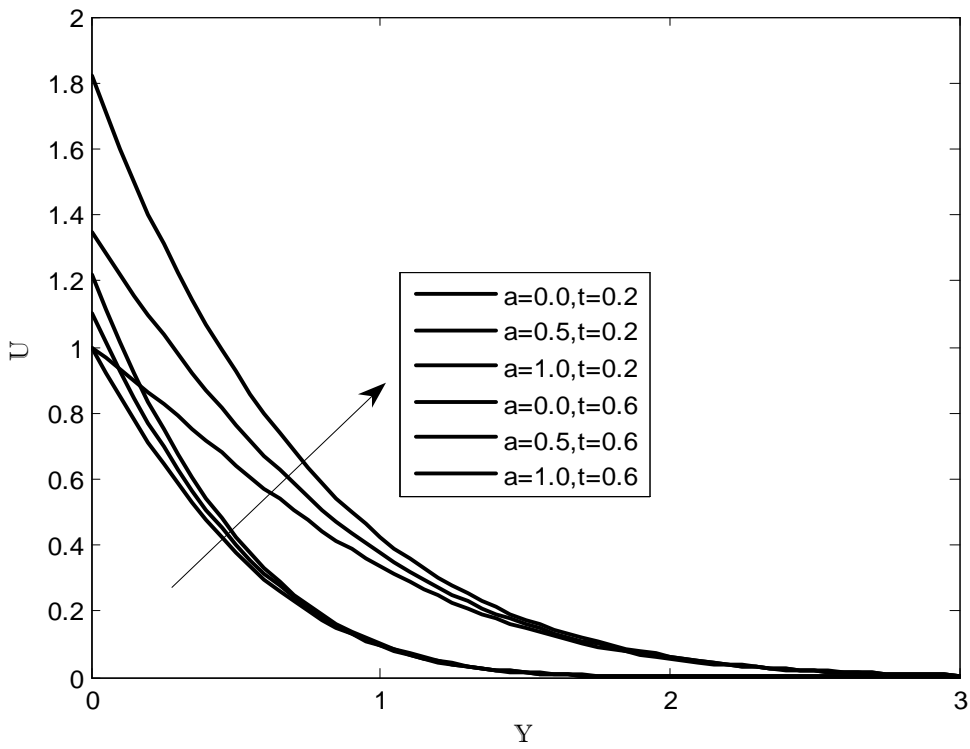


FIG. (6): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'a'

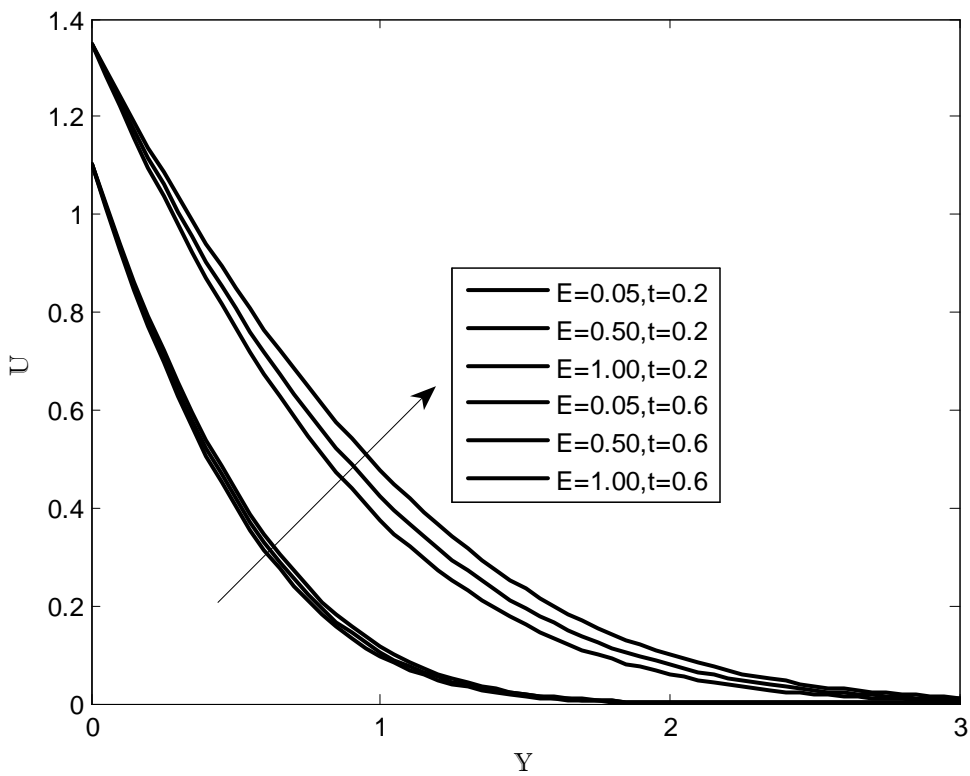


FIG. (7): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'E'

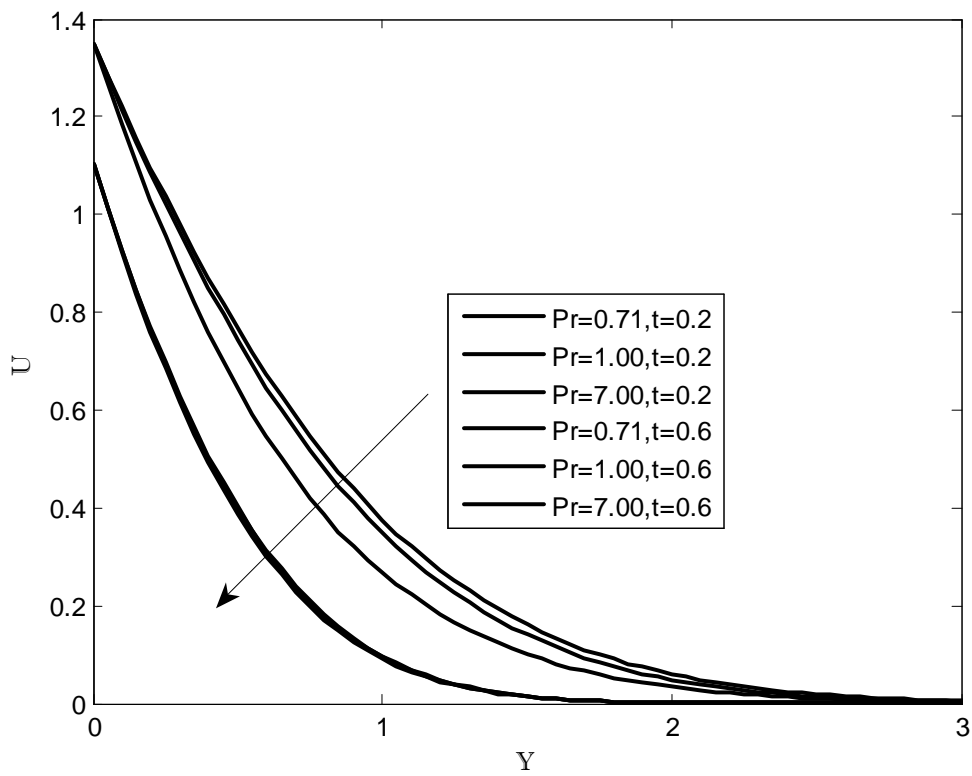


FIG. (8): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'Pr'

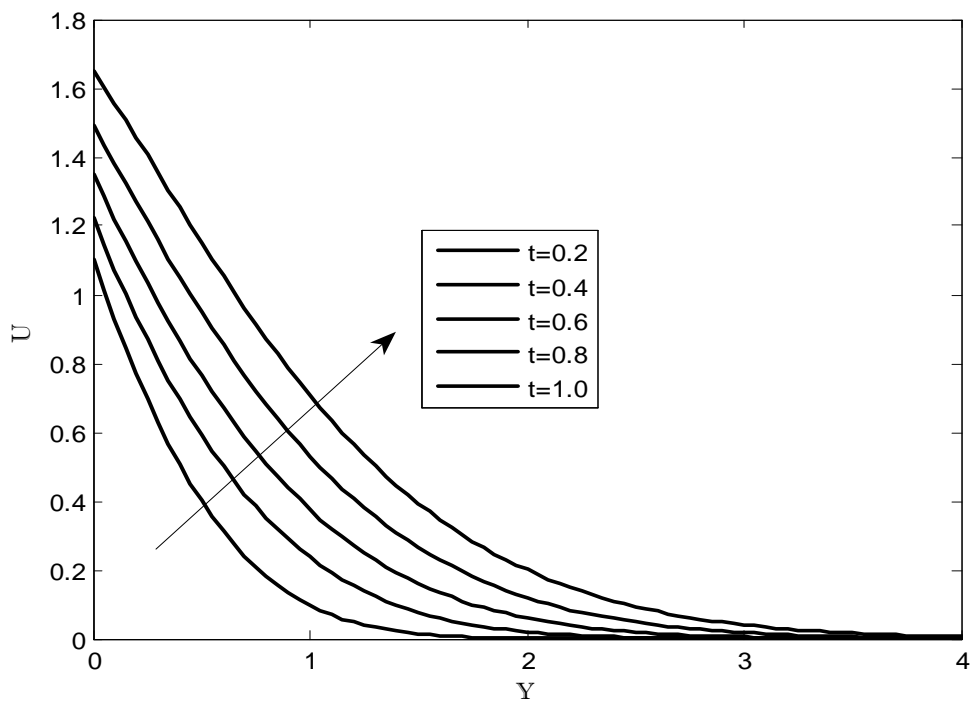


FIG. (9): VELOCITY PROFILE FOR DIFFERENT VALUES OF 't'


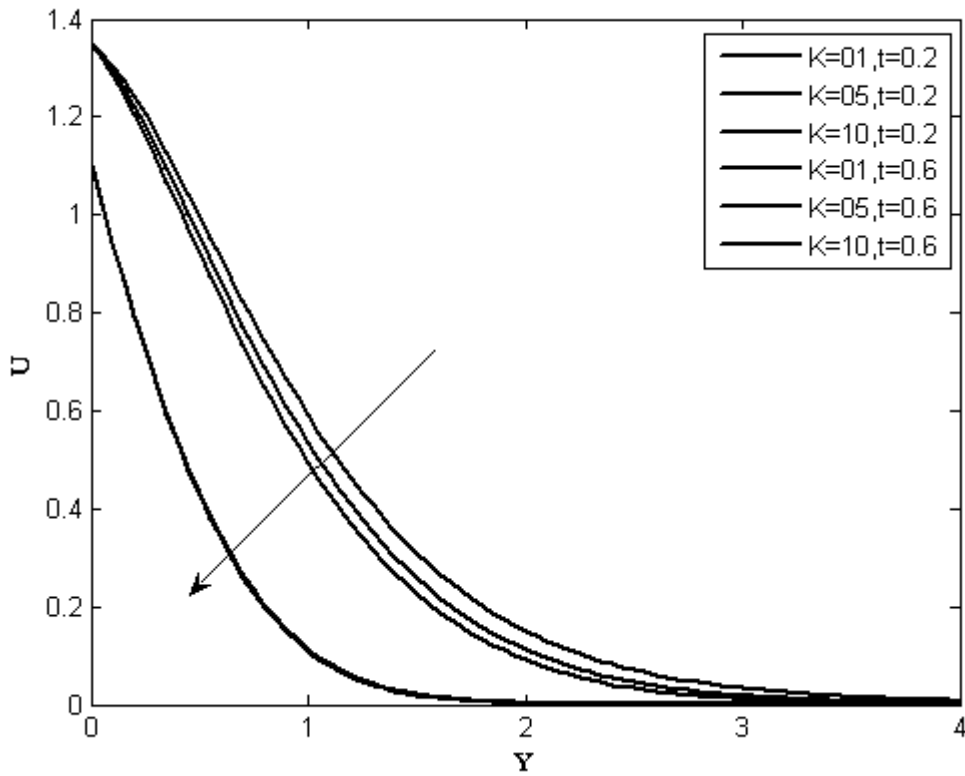


FIG. (10): VELOCITY PROFILE FOR DIFFERENT VALUES OF 'K'

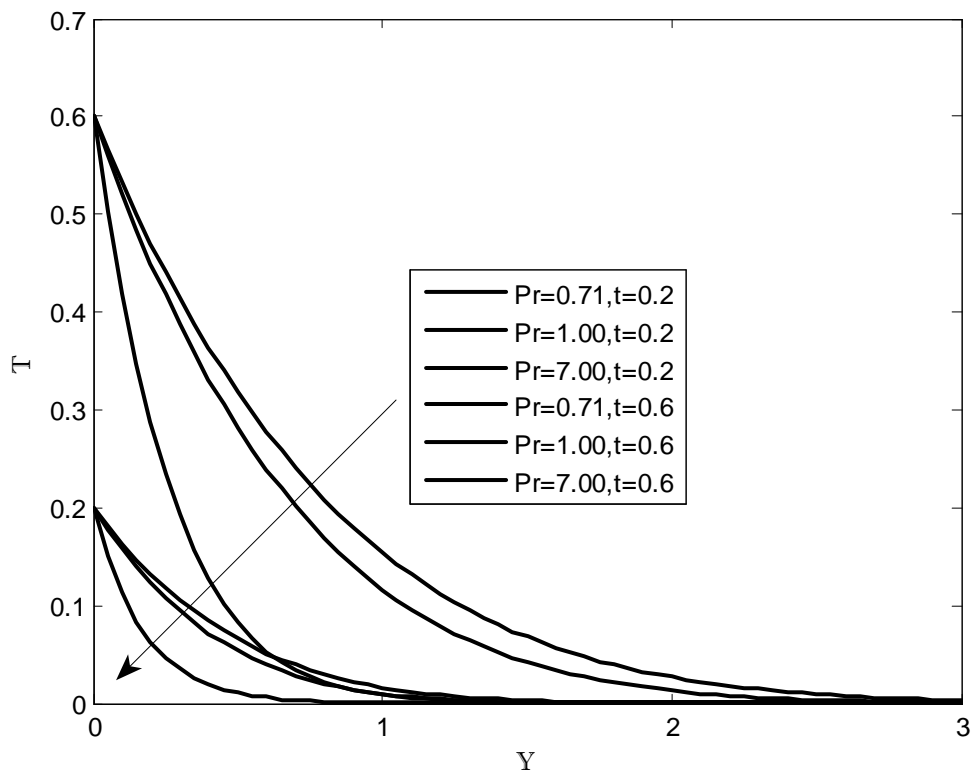

1) : TEMPERATURE PROFILE FOR DIFFERENT VALUES OF 'Pr'

FIG.(1

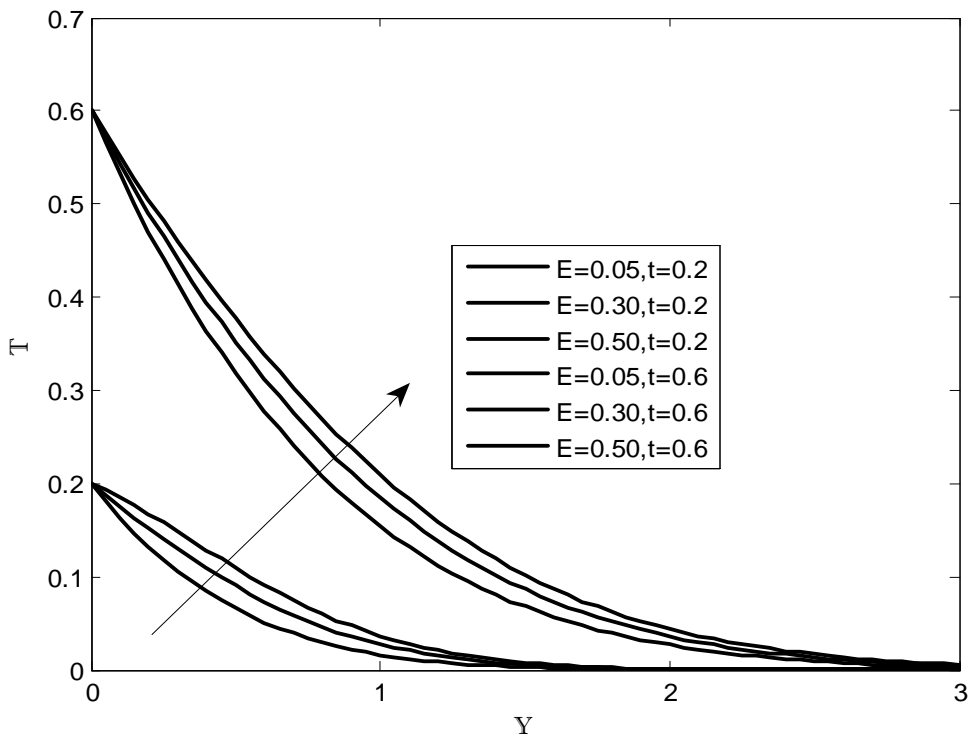


FIG.(12) : TEMPERATURE PROFILE FOR DIFFERENT VALUES OF 'E'

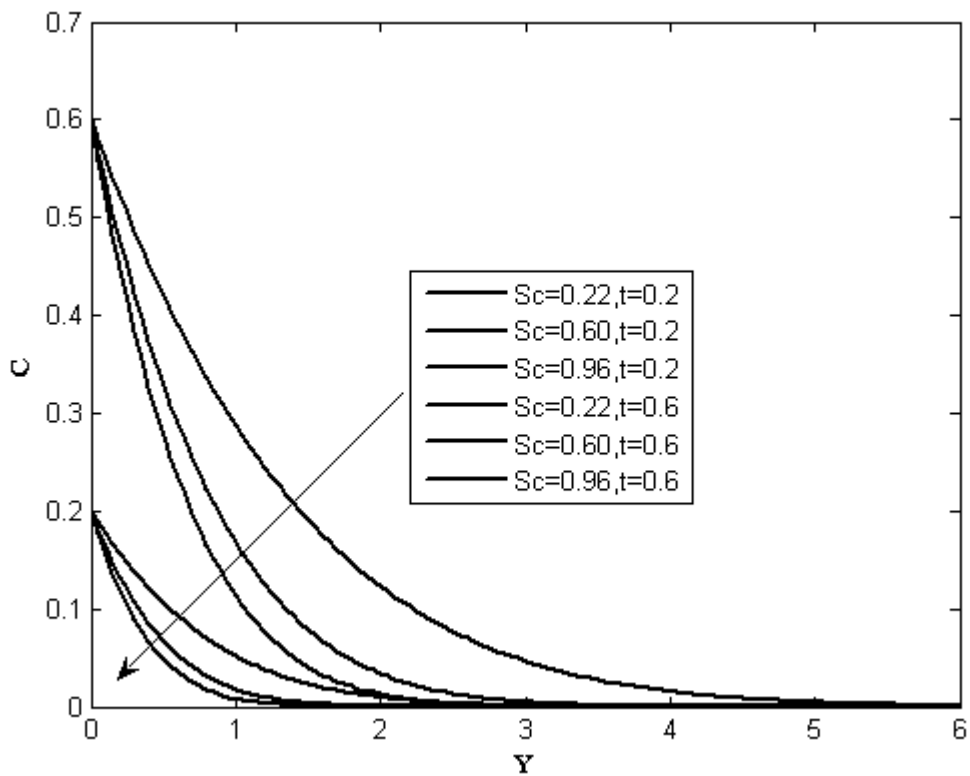


FIG.(13) : CONCENTRATION PROFILE FOR DIFFERENT VALUES OF 'Sc'

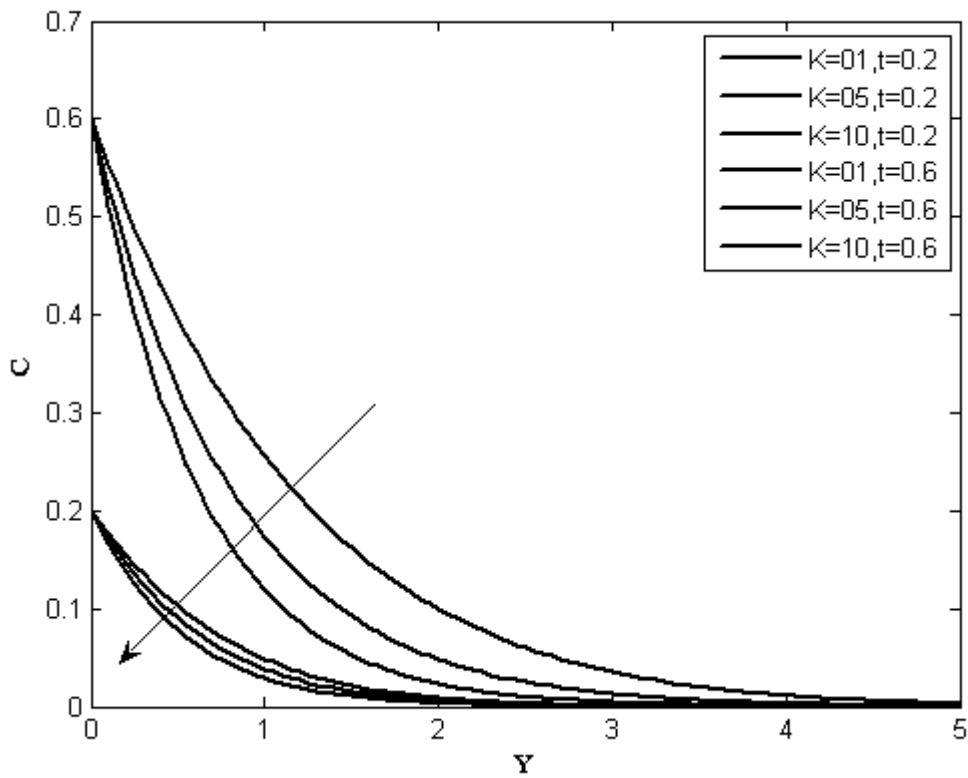


FIG.(14) : CONCENTRATION PROFILE FOR DIFFERENT VALUES OF 'K'

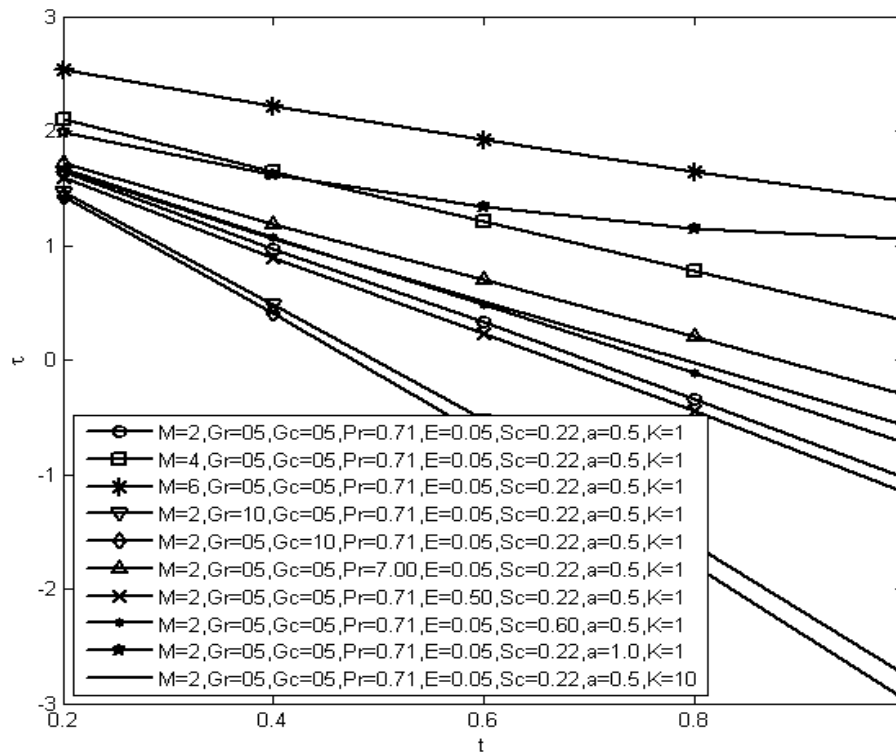


FIG.(15) : SKIN FRICTION PROFILE

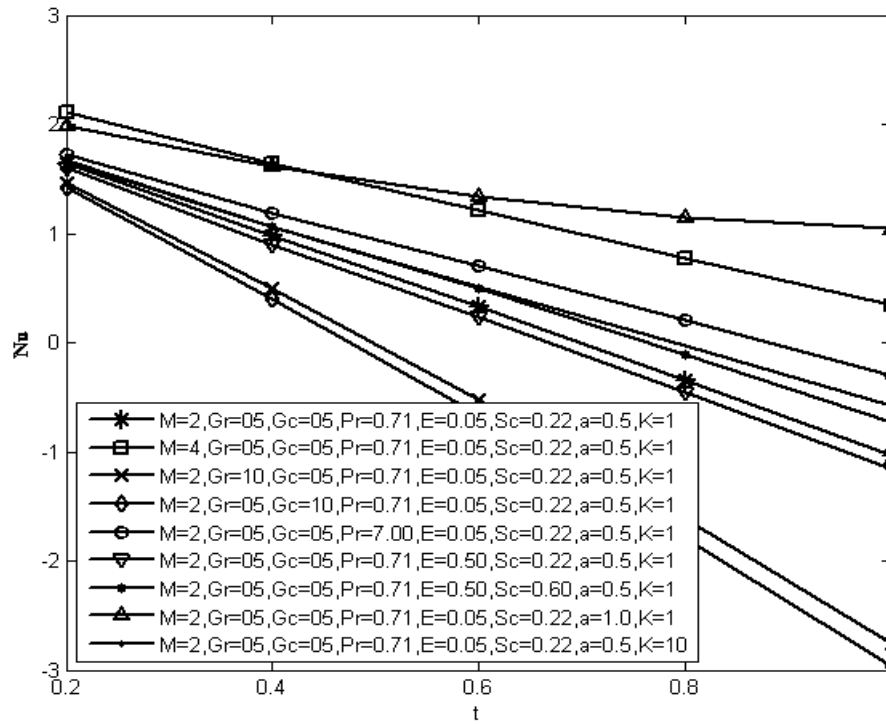


FIG.(16) : NUSSELT NUMBER PROFILE

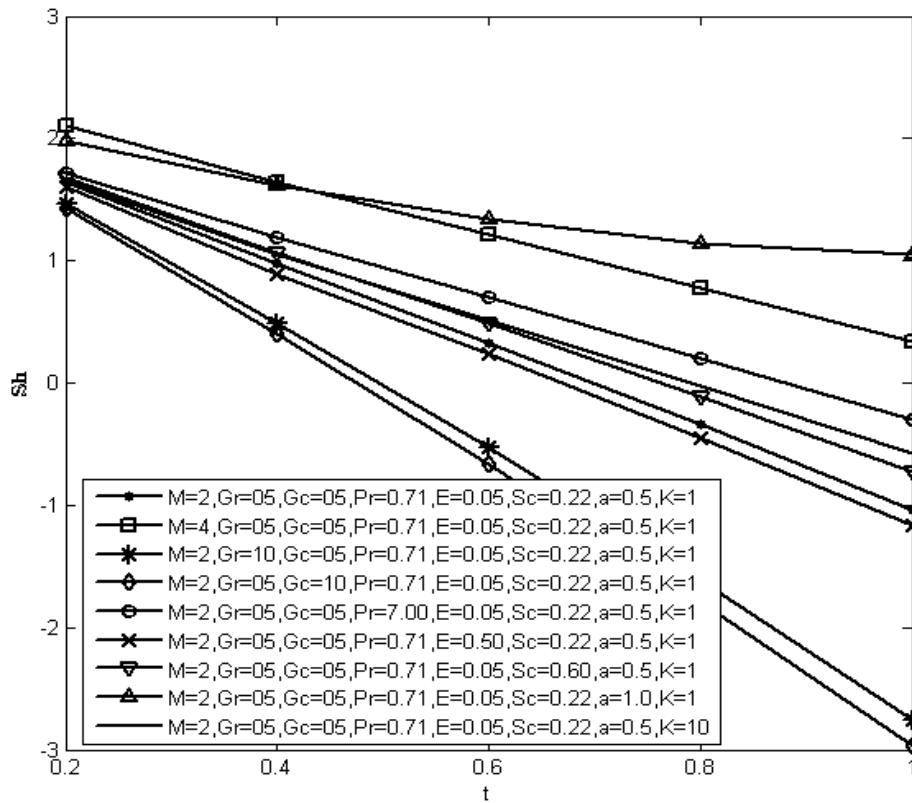


FIG.(17) : SHERWOOD NUMBER PROFILE